

# FORMULA 65 LED EXTREME



Formula 65 LED Extreme



Adhesive Left/Right/Down - 19044



Ceiling Bracket F65 Extreme - 19049



Ceiling Mounting



Double Sided Screen with Down Arrow - 19043



Formula 65 LED Extreme



Recessed Box -- Frames F65 Extreme - 19048



Wall Bracket - 19049 -- Double Sided Screen with Left/Right Arrows - 19042




Wall Mounting

Designed to withstand extreme temperatures as low as -40°C such as those in cold storage units at high altitudes. The emergency ice pack power supply that confers these features is separately supplied and includes an automatic battery heating system that does not degrade with extremely low temperatures. The device is designed to accommodate the feed-through cabling (section 2.5 mm) and is suitable for use with the M20 commercial brackets, both for smooth and corrugated tubes of 16 and 20 mm diameter.

Product category: Luminaires, Exit Signs

## FEATURES

<b>Application</b>	Offices, Public Areas, Industrial, Areas, Emergency Lighting
<b>Colours (RAL)</b>	White RAL 9003
<b>IK Rating</b>	IK07
<b>IP Rating</b>	IP65
<b>Material</b>	Polycarbonate
<b>Mounting Options</b>	Ceiling Mounted and Wall Mounted
<b>Visibility (m)</b>	25m
<b>Voltage (v)</b>	230V

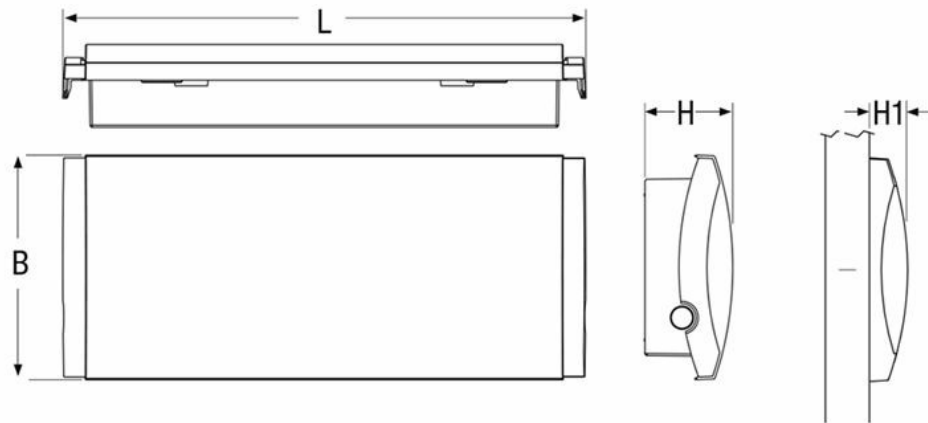

Potenza** W	• Dimensioni (mm) •			H1	Distanza di visibilità (DV)	
	L	B	H		pittogramma	bandiera
24	354	152	63,4	26	25 m	28 m

## ACCESSORIES SUPPLIED

Order Code	Description
	Through-Wiring Cable
	M20 Cable Gland (Smooth and Corrugated Tubes 16 and 20mm Diameter)
19044	Adhesive Left/Right/Down F65 (only for maintained models)

## TO BE ORDERED SEPARATELY

Order Code	Description
19046	Ice Pack Battery
19048	Recessed Box + Frames F65 Extreme
19049	Ceiling Brackets F65 Extreme
19045	Wall Bracket Suspended F65
19042	Double Sided Screen with Left/Right arrows F65 (Recessed into Ceiling and Wall Mounting)
19043	Double Sided Screen with Down arrows F65 (Recessed into Ceiling and Wall Mounting)
19044	Adhesive Left/Right/Down F65
12101	Remote Control (RM Inhibit Function)
RA03	AutoRipara Battery System (NiMH 3.6V 1.7Ah)

## CONTROL SYSTEM ORDER CODES

### LOGICA

Part No.	Net Weight	Insulation Class	Emergency Operation Mode	Battery	Battery Duration	Luminaire Power	Luminaire Flux	Luminaire Flux in Emergency	Autoripara Battery
19269	0.6kg	II	Non-maintained mode	NiMH 3.6V 1.7Ah	1hr	1.5W	-	400/140lm	800/270lm
19270	0.6kg	II	Maintained mode	NiMH 3.6V 1.7Ah	1hr	4.5W	-	400/140lm	800/270lm

## LOGICA FM

Part No.	Net Weight	Insulation Class	Emergency Operation Mode	Battery	Battery Duration	Luminaire Power	Luminaire Flux	Luminaire Flux in Emergency	Autoripara Battery
19275	0.6kg	II	Non-maintained mode	NiMH 3.6V 1.7Ah	1hr	1.5W	-	400/140lm	800/270lm
19276	0.6kg	II	Maintained mode	NiMH 3.6V 1.7Ah	1hr	4.5W	-	400/140lm	800/270lm

This product is currently unavailable.