

# INDICA LED 30





Cantilevered Mounting on Ceiling with Ties



Ceiling Mounting



Indica LED 30m



Dimensioni foro da incasso: 297x43 mm

Recess Bracket for Suspended Ceiling 30m - 19386



Recessed Mounting on Ceiling



Rods 250mm Indica DF - 19380 -- Rods 500mm Indica DF - 19381 -- Rods 1000mm Indica DF - 19382



Suspended Cantilevered Mounting - 19383



Wall Mounting



Wire Suspension Max 100 - 19383


Indica LED is the design solution for sign lighting, with a high technological content for all types of applications. A back light system is used and thanks to a patented optical system, it guarantees maximum uniformity of sign illumination with excellent luminosity, with a range of 30 meters. The fixture is also particularly versatile because it has a universal bracket that can be fitted either on the long side, for mounting on the ceiling, or on the long side for suspended applications on the wall. A single sided version is also available for above-door installations. All Indica LED products have silk-screen printed opaline Polycarbonate diffusers for easier installation and to guarantee a very high sign illuminance uniformity (over 500cd/sq.) on the white part.

Product category: Exit Signs

## FEATURES


<b>Application</b>	Offices, Public Areas, Shops, Safety Sign
<b>Colours (RAL)</b>	Aluminium
<b>IK Rating</b>	IK03
<b>IP Rating</b>	IP40 - Single Sided, IP41 - Double Sided
<b>Material</b>	Sheet Steel Epoxy Coated
<b>Mounting Options</b>	Ceiling Mounting (suspended or bracket) or Wall Mounted
<b>Norms</b>	2006/95/CE, 2004/108/CE, CEI EN 62471, CEI EN 62034, CEI EN 60598-2-2, CEI EN 60598-2-22
<b>Visibility (m)</b>	30m
<b>Voltage (v)</b>	230v, 24v dc

*Versione bifacciale a parete*

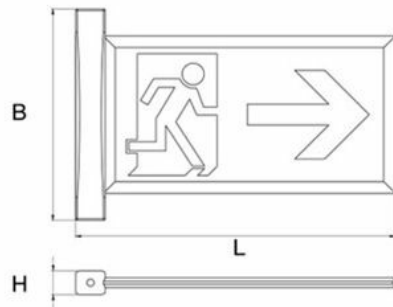


DV	L	B	H
30	366	252	36

*Versione bifacciale a soffitto*

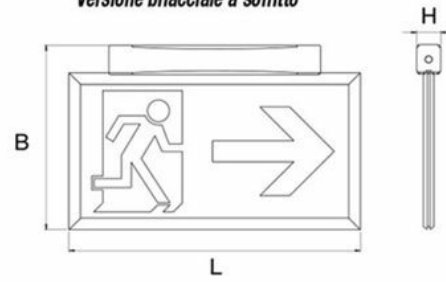


DV	L	B	H
30	335	216	36

*Versione monofacciale a incasso*

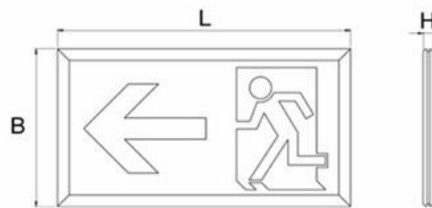

DV	L	B	H
30	335	185	15

*Versione monofacciale parete*

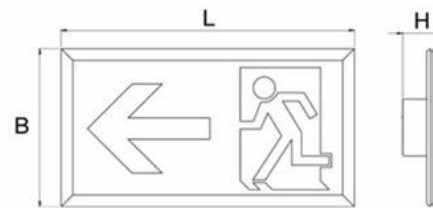

DV	L	B	H
30	335	185	38

## ACCESSORIES SUPPLIED

Order Code	Description
	Adapter for Boxes 506
	Diffusers Right/Left/Down

## TO BE ORDERED SEPARATELY

Order Code	Description
19380	Rods 250mm Indica DF
19381	Rods 500mm Indica DF
19382	Rods 1000mm Indica DF
19383	2m Wire Suspension to mount Indica DF
19386	Suspended Ceiling Recessed Bracket 30m

## CONTROL SYSTEM ORDER CODES

## AUTO-TEST

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
19318	Exit Sign : Single Sided	M/NM	1-3h	NiMH 7.2V 1.2Ah	3.0W	-	-	-	0C° to +40C°	I	1.1kg
19308	Exit Sign : Double Sided	M/NM	1-3h	NiMH 7.2V 0.6Ah	4.2W	-	-	-	0C° to +40C°	II	0.8kg

## LOGICA

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
19314	Exit Sign : Single Sided	MNM	1-3h	NIMH 7.2V 1.2Ah	3.0W	-	-	-	0C° to +40C°	I	1.1kg
19304	Exit Sign : Double Sided	MNM	1-3h	NIMH 7.2V 0.6Ah	4.2W	-	-	-	0C° to +40C°	II	0.8kg

## LOGICA FM

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
19316	Exit Sign : Single Sided	MNM	1-3h	NIMH 7.2V 1.2Ah	3.0W	-	-	-	0C° to +40C°	I	1.1kg
19306	Exit Sign : Double Sided	MNM	1-3h	NIMH 7.2V 0.6Ah	4.2W	-	-	-	0C° to +40C°	II	0.8kg



## EVG CBU CENTRALIZED

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W.	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
TB16722	Exit Sign : Single Sided	198V - 254V/50Hz	110V - 276V	3.0W	-	-	-10°C to +40°C	I	-
TB16712	Exit Sign : Double Sided	198V - 254V/50Hz	110V - 276V	5.4W	-	-	-10°C to +40°C	I	-

## ALOG CBU CENTRALIZED

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W.	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
TB16730	Exit Sign : Single Sided	198V-254V/50Hz	176V-276V	3.0W	5.0VA	-	-10 to +40°C	I	-
TB16720	Exit Sign : Double Sided	198V-254V/50Hz	176V-276V	5.4W	7.0VA	-	-10 to +40°C	I	-

## SICURO 24V DECENTRALIZED

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W.	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
TB16730-S24	Exit Sign : Single Sided	24V +/- 20% DC	24V +/- 20% DC	2.2W	-	-	-10°C to +40°C	III	-
TB16720-S24	Exit Sign : Double Sided	24V +/- 20% DC	24V +/- 20% DC	4.3W	-	-	-10°C to +40°C	III	-

This product is currently unavailable.