

UP LED MULTI






Elegant and compact emergency lighting fixture. Made to be mounted on plasterboard with a hole having a diameter of 60mm. Available in two versions, autonomy 1h and 3h. Each version is equipped with 3 interchangeable lenses: a long lense with an asymmetric light beam for corridors and escape routes; a wide lens with a symmetric light beam for main areas; and a spot light beam for high ceilings.

Product category: Luminaires

FEATURES

Application	Offices, Public Areas, Shops, Emergency Lighting
Colours (RAL)	White RAL 9003
IK Rating	IK07
IP Rating	IP42
Material	Polycarbonate
Mounting Options	Recessed Ceiling
Norms	2006/95/CE, 2004/108/CE, CEI EN 62471, CEI EN 62034, CEI EN 60598-2-2, CEI EN 60598-2-22
Voltage (v)	230v

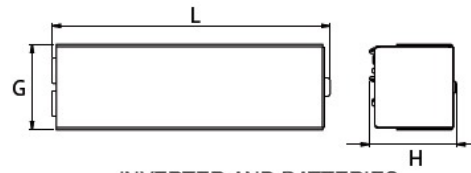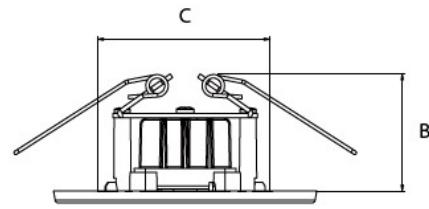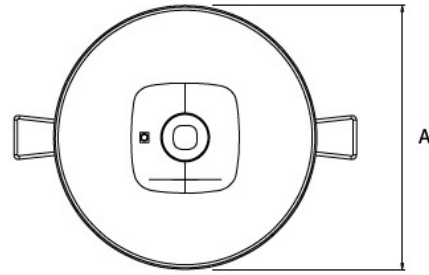

INVERTER AND BATTERIES

Power*	• Dimensions (mm) •						Lamp
	A	B	C	L	G	H	
24	90	40	60	200	46	43	1 LED

* Indicative power for comparison with fluorescent tube fixtures

ACCESSORIES SUPPLIED

Order Code	Description
-	Escape Route Lens - Asymmetrical Lens for Mounting Heights up to 3.5m
-	Open Area Lens - Symmetrical Lens for Mounting Heights up to 3.5m
-	High Ceiling Lens - Spot Beam Lens for Mounting up to 7m

TO BE ORDERED SEPARATELY

Order Code	Description
15036	LG Module*
15037	LGFM Module*
15038	DALI Module*

*Opticom System Only

CONTROL SYSTEM ORDER CODES

STANDARD

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
4331	UP LED Multi Emergency Downlight	NM	3h	NiCd 3.6V 1.5Ah	1.5W	180lm	-	-	0°C + +40°C	I	0.4kg

AUTO-TEST

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
4390	UP LED Multi AT Opticom Emergency Downlight	NM	1-1.5-2-3-8h	LTO 7.2V 0.5Ah	7.5W	180/120/90/65/25lm	-	-	-20°C + +50°C	I	0.4kg
4391	UP LED Multi AT Opticom Emergency Downlight	M	1-1.5-2-3-8h	LTO 7.2V 0.5Ah	7.5W	180/120/90/65/25lm	-	150lm	-20°C + +50°C	I	0.4kg

OPTICOM AUTO TEST LUMINAIRES C/W TITANIUM BATTERY

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
4390	UP LED Multi AT Opticom Emergency Downlight	NM	1-1.5-2-3-8h	LTO 7.2V 0.5Ah	7.5W	180/120/90/65/25lm	-	-	-20°C + +50°C	I	0.4kg
4391	UP LED Multi AT Opticom Emergency Downlight	M	1-1.5-2-3-8h	LTO 7.2V 0.5Ah	7.5W	180/120/90/65/25lm	-	150lm	-20°C + +50°C	I	0.4kg

