


CENTROSTRADA LED



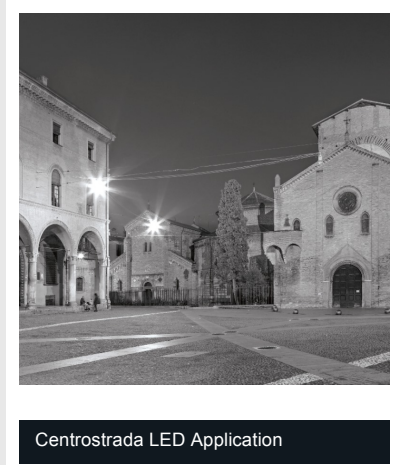

This device completes the range of street lighting. For suspension installation on cables or rods where poles cannot be used, such as along the middle of roads or in historical city centres.


The design is simple in shape, yet succeeds in conveying a sense of extreme elegance and technical functionality.

The SmartDriver accessories provided compliment the leading technological features of the device, which can be adapted to the most suitable format for Smart City integration.

Product category: Suspended, Outdoor, Street Lighting

FEATURES

Application	Public Areas, Walkways, Pathways Indicators
Ballast	Constant Current LED Smart Driver (programmable)
Colour Rendering	>80
Colour Temp. (K)	4000K
Colours (RAL)	Grey RAL 7040
Energy Class	A++
IK Rating	IK09
IP Rating	IP66
Material	Die-Cast Aluminium with Polyester Powder Coating
Mounting Options	Suspension, Tensioned Cable
Norms	[40,73,96,100,100]
Optics	Sheet Metal with Parabolic Development in Anti-Iridescent, Mirror Finished, Anodised Aluminium
Voltage (v)	230v

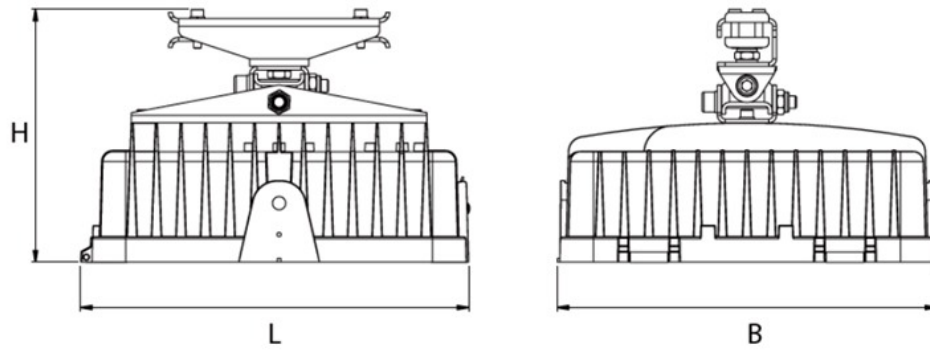

Power * W	• Dimensions (mm) •			Weight max kg
	L	B	H	
50	309	302	201	5.5
70	309	302	201	5.5

ACCESSORIES SUPPLIED

Order Code	Description
-	M20 Cable Gland with Ventilation Valve
418319000	Adjustable Bracket for Tensioned Cable (-20° +20°)

TO BE ORDERED SEPARATELY

Order Code	Description
12657	Protective Grid (50/70 Only)
12658	Protective Grid (100/150/250 Only)
20102	Building Automation Central Unit
20124	Building Automation Central Unit + Wifi
20104	2 Input Interface - Radio Transmitter
15022	Building Automation Radio Module
15024	DALI Module
15034	1-10V Module

CONTROL SYSTEM ORDER CODES

SMART DRIVER

Power W.	Order Code	Description	LED Power W.	Power Consumption W.	No LEDs	Flux of LEDs	Flux of Fixture	Luminous efficiency lm/W
1x50	CS50SD	Centrostrada LED 1x50 SD 4000K	32W	35W	24	5300lm	4400lm	126lm/W
1x70	CS70SD	Centrostrada LED 1x70 SD 4000K	45W	50W	24	7600lm	6200lm	124lm/W
1x100	CS100SD	Centrostrada LED 1x100 SD 4000K	64W	70W	48	10400lm	8600lm	124lm/W
1x150	CS150SD	Centrostrada LED 1x150 SD 4000K	92W	100W	48	14500lm	12000lm	120lm/W
1x250	CS250SD	Centrostrada LED 1x250 SD 4000K	120W	130W	48	18500lm	15000lm	115lm/W

