

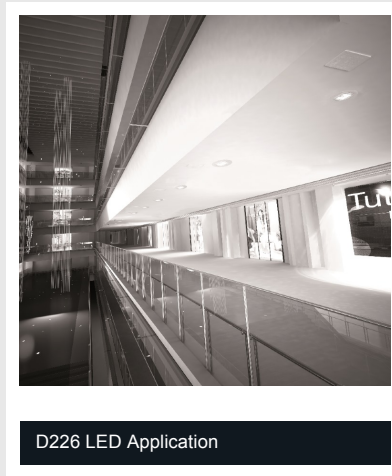


D226 LED

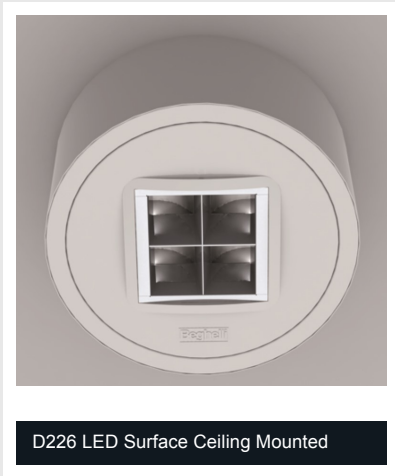

D226 LED

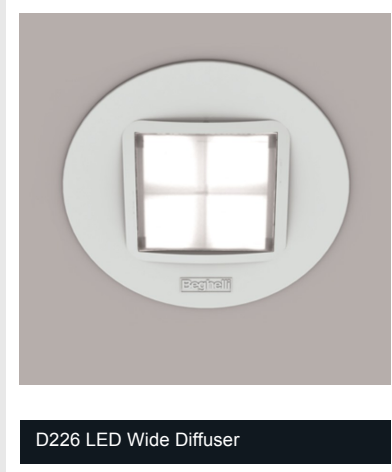

Downlight with very high light output. The optical system allows maximized illumination with excellent anti-glare features, so it is also suitable in the presence of video terminals.


The control gear is independent of the fixture and is supplied already wired to the optical compartment, complete with cable ties. The diffusion of the heat in products with LED sources considerably reduces the overheating of the illuminating surfaces, ensuring greater environmental comfort and less impact on the illuminated objects.

Together with the substantial absence of UV radiation, these features make the product particularly suitable for exhibition areas. An additional accessory is available for lighting the source and the LEDs of the device in the event of a black-out.

Product category: Recessed, Surface, Downlights, Ceiling Mounted, Indoor

FEATURES

Application	Offices, Public Areas, Shops, Commercial Areas
Ballast	Constant Current LED Smart Driver (programmable)
Colour Rendering	>80
Colour Temp. (K)	4000K
Colours (RAL)	White RAL 9003
Energy Class	A++
IK Rating	IK05
IP Rating	IP20
Material	Die-Cast Aluminium
Norms	[65,96,100,100,100]
Optics	Dark Light
Voltage (v)	230v

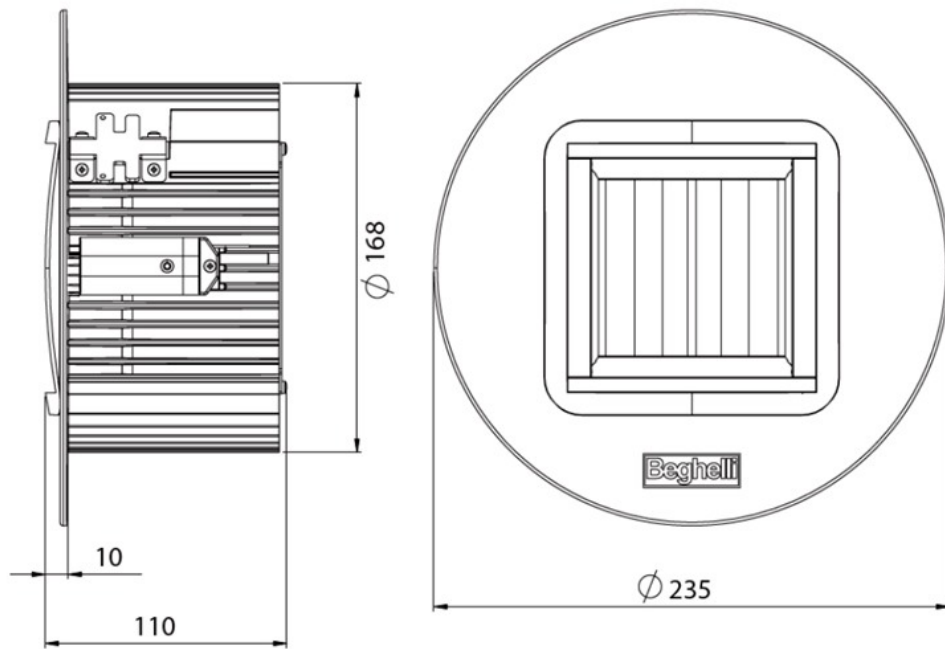

recessed version for holes from 170
to 200 mm

ACCESSORIES SUPPLIED

Order Code	Description
15039	Opticom Smart Photosensor


TO BE ORDERED SEPARATELY

Order Code	Description
20090	Ring Adapter 240 DWL LED
20091	Ceiling Mounted Accessory DWL LED
20098	Wide Diffuser DWL/ RL08 LED
20102	Building Automation Central Unit
20124	Building Automation Central Unit & Wifi
20104	2 Input Interface - Radio Transmitter
15022	Building Automation Radio Module
15024	DALI Module
15034	1-10V Module

CONTROL SYSTEM ORDER CODES

SMART DRIVER

Power W.	Order Code	Description	LED Power W.	Power Consumption W.	No LEDs	Flux of LEDs	Flux of Fixture	Luminous efficiency lm/W
2x26	D226SD	DWL SPOT LED 2x26 INC SD 4000K	16W	20W	40	2200lm	1860lm	93lm/W

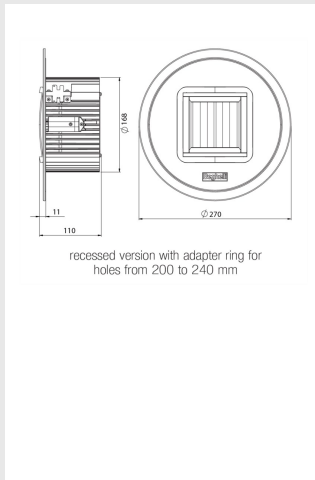

This product is currently unavailable.