


# **GEO LED LITE**



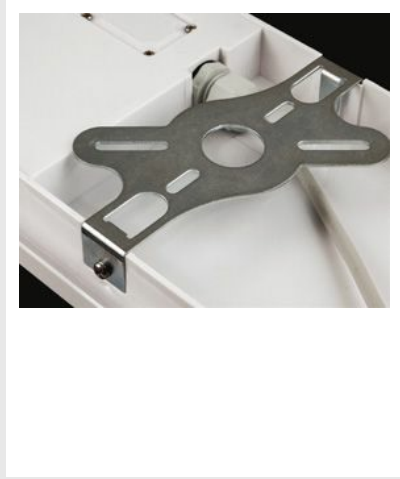

Ceiling lamp suitable for indoor and outdoor environments, for ceiling installation or wall areas where strong and diffused lighting is required.


Particularly suitable for the lighting of stairs, areas of external access, corridors/interiors in shopping centres, shops, hotels and restaurants.

The unit is equipped with a reflector in a white plate and a high efficiency LED whose positioning on the reflector has been designed to obtain a wide beam with high luminous efficiency.

Product category:

## FEATURES

<b>Application</b>	Secondary Areas
<b>Ballast</b>	For constant current LED
<b>Colours (RAL)</b>	White, Black
<b>IK Rating</b>	IK07
<b>IP Rating</b>	IP65
<b>Material</b>	Self-extinguishing Thermoplastic (Polycarbonate)
<b>Norms</b>	[41,70,89,95,100]
<b>Optics</b>	Symmetrical Diffusing
<b>Voltage (v)</b>	230v

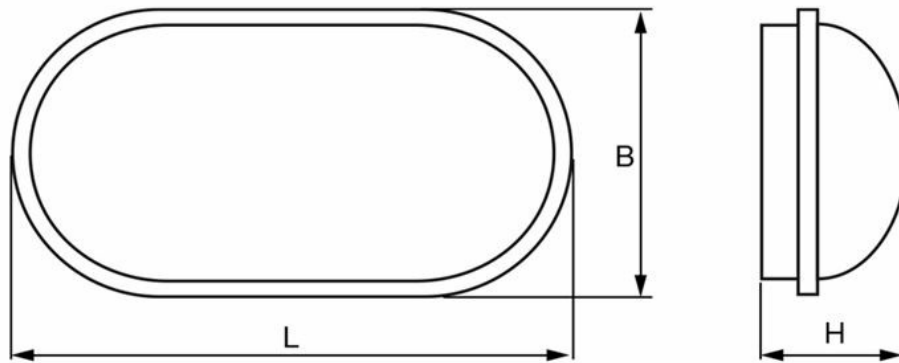

Potenza W	• Dimensioni (mm) •			Peso kg
	L	B	H	
15	214	114	63	0,28
20	269	145	74	0,43

## CONTROL SYSTEM ORDER CODES

### TRADITIONAL

Part Number	Net Weight (kg)	Insulation Class	Temperature (K)	Luminaire Power (W)	Luminaire Flux (lm)	Luminous Efficacy (lm/W)
75420	0.3kg	II	3000K	15W	1250lm	84lm/W
75421	0.3kg	II	4000K	15W	1250lm	84lm/W
75422	0.42kg	II	3000K	20W	1650lm	83lm/W
75423	0.42kg	II	4000K	20W	1650lm	83lm/W
75424	0.3kg	II	3000K	15W	1250lm	84lm/W
75425	0.3kg	II	4000K	15W	1250lm	84lm/W
75426	0.42kg	II	3000K	20W	1650lm	83lm/W
75427	0.42kg	II	4000K	20W	1650lm	83lm/W