


GEO LED LITE



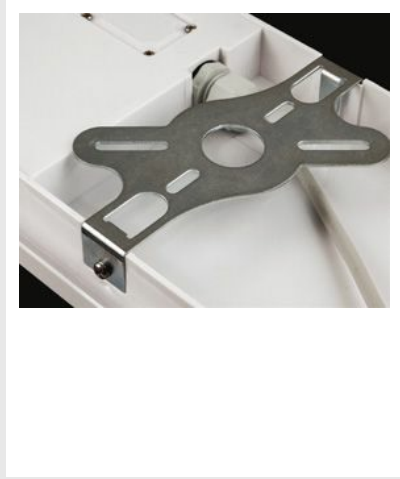

Ceiling lamp suitable for indoor and outdoor environments, for ceiling installation or wall areas where strong and diffused lighting is required.


Particularly suitable for the lighting of stairs, areas of external access, corridors/interiors in shopping centres, shops, hotels and restaurants.

The unit is equipped with a reflector in a white plate and a high efficiency LED whose positioning on the reflector has been designed to obtain a wide beam with high luminous efficiency.

Product category:

FEATURES

Application	Secondary Areas
Ballast	For constant current LED
Colours (RAL)	White, Black
IK Rating	IK07
IP Rating	IP65
Material	Self-extinguishing Thermoplastic (Polycarbonate)
Norms	[41,70,89,95,100]
Optics	Symmetrical Diffusing
Voltage (v)	230v

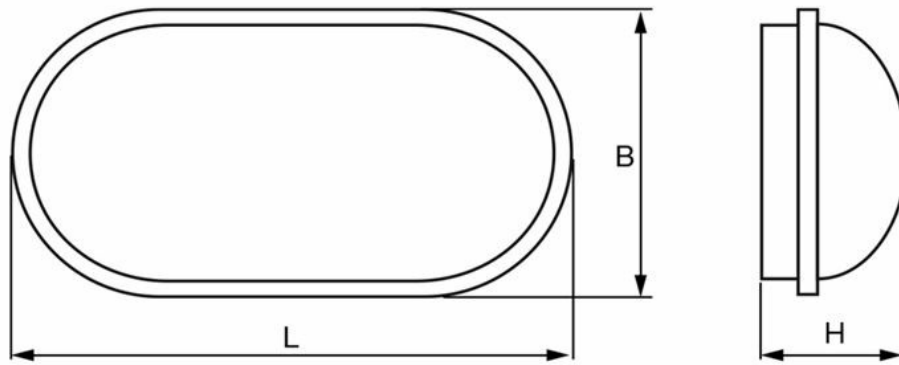

Potenza W	• Dimensioni (mm) •			Peso kg
	L	B	H	
15	214	114	63	0,28
20	269	145	74	0,43

CONTROL SYSTEM ORDER CODES

TRADITIONAL

Part Number	Net Weight (kg)	Insulation Class	Temperature (K)	Luminaire Power (W)	Luminaire Flux (lm)	Luminous Efficacy (lm/W)
75420	0.3kg	II	3000K	15W	1250lm	84lm/W
75421	0.3kg	II	4000K	15W	1250lm	84lm/W
75422	0.42kg	II	3000K	20W	1650lm	83lm/W
75423	0.42kg	II	4000K	20W	1650lm	83lm/W
75424	0.3kg	II	3000K	15W	1250lm	84lm/W
75425	0.3kg	II	4000K	15W	1250lm	84lm/W
75426	0.42kg	II	3000K	20W	1650lm	83lm/W
75427	0.42kg	II	4000K	20W	1650lm	83lm/W