


EUROCOMPLETA LED



EuroCompleta LED




EuroCompleta LED

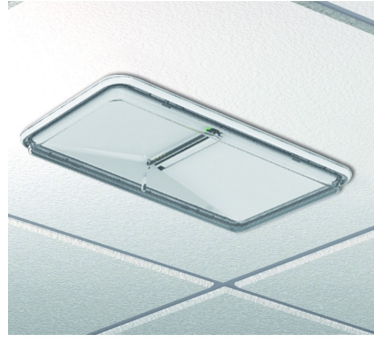


EuroCompleta LED Recessed Ceiling Mounted




EuroCompleta LED Suspension Mounted

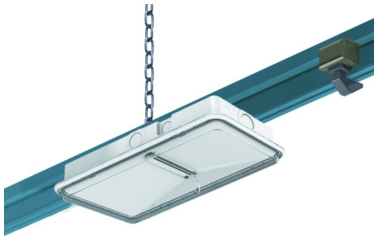


EuroCompleta LED Electrified Track Mounted




EuroCompleta LED Suspension Hooks




EuroCompleta LED Recessed Wall Mounted

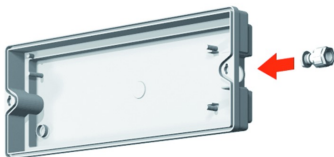

EuroCompleta LED Cable Gland

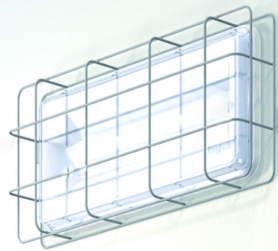

EuroCompleta LED with Protective Grid



EuroCompleta LED Protective Grid



EuroCompleta LED Exit with Adhesive Diffuser



Euro Completa LED Exit with Exit Sign Diffuser

Emergency luminaire with innovative optical system that offers a good distribution of the light beam.


Possibility to set the unit in SE or SA configuration and select the 1h or 3h autonomy by simply cutting a wire on the electric board. It consists of a large functional wiring compartment for accommodating 2.5m conductors and predisposed for wiring through.

Available in IP42 and IP65 versions which can be wall and ceiling mounted. Prepared for installation with 16 diameter and 20 diameter tubes.

Product category: Luminaires, Exit Signs

FEATURES

Application	Offices, Public Areas, Industrial, Areas, Emergency Lighting
Colours (RAL)	White RAL 9003
IK Rating	IK05
IP Rating	IP42, IP65
Material	Polycarbonate
Mounting Options	Wall, Ceiling, Suspended Ceiling, Recessed, Electrified Track
Visibility (m)	24m
Voltage (v)	230V

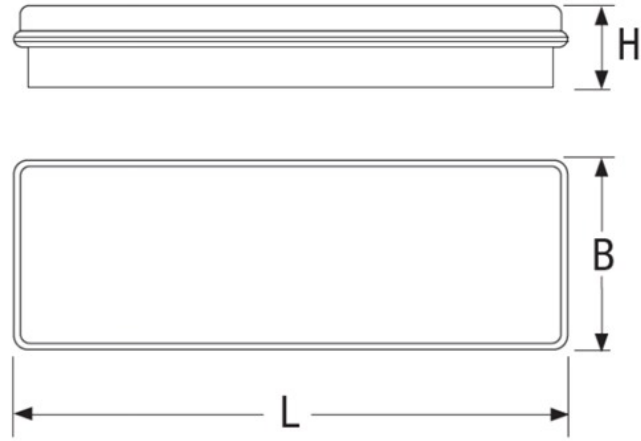

Power * (W)	• Dimensions (mm) •			Visibility distance
	L	B	H	
11, 24	300	138	55	24m

* Indicative power for comparison with fluorescent tube lighting

ACCESSORIES SUPPLIED

Order Code	Description
2742	IP65 Recessed Box
3727	PG16/ PG20 Cable Gland
-	Exit Sign Flag VD 24m

TO BE ORDERED SEPARATELY

Order Code	Description
2751	False Ceiling Brackets
3723	Suspension Hooks
3907	Protective Grid

CONTROL SYSTEM ORDER CODES

STANDARD

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
4113	EuroCompleta LED IP42	M/NM	1-3h	LiFe 3,2V 1,5Ah	2.5W	120/40lm	-	120lm	0°C + +50°C	II	0.8kg
4115	EuroCompleta LED IP65	M/NM	1-3h	LiFe 3,2V 1,5Ah	2.5W	120/40lm	-	120lm	0°C + +50°C	II	1kg

AUTO-TEST

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
4114	EuroCompleta LED IP42	MNM	1-3h	LiFe 3,2V 1,5Ah	4W	200/70lm	-	200lm	0°C ÷ +50°C	II	0.8kg
4116	EuroCompleta LED IP65	MNM	1-3h	LiFe 3,2V 1,5Ah	4W	200/70lm	-	200lm	0°C ÷ +50°C	II	1kg

