

PLEXILED



PlexiLED Single Sided Exit Sign



PlexiLED Single Sided Exit Sign



PlexiLED Double Sided Exit Sign



PlexiLED Double Sided Exit Sign with Wire Suspension

Exit Sign Luminaire with flat design casing in sheet steel and frameless display with integrated light guide panel made of clear plastic. Homogeneous light distribution ensures optimal illumination of the exit sign. Single or double-sided escape route signage is provided thanks to exchangeable films.


Versions for surface wall mounting, surface ceiling mounting, recessed ceiling mounting, wire suspension and with accessories bracket mounting.

Product category: Exit Signs

FEATURES

Application	Offices, Public Areas, Shops, Safety Sign
Colours (RAL)	White RAL 9003
IP Rating	IP20
Material	Sheet Steel (Body & Cover), Methacrylate (Display Pane)
Mounting Options	Surface Wall (Single Sided), Surface Ceiling, Recessed Ceiling, Wire Suspension, Bracket Suspension (Double Sided)
Visibility (m)	20m, 30m
Voltage (v)	230v, 24v DC*

*Sicuro24 System

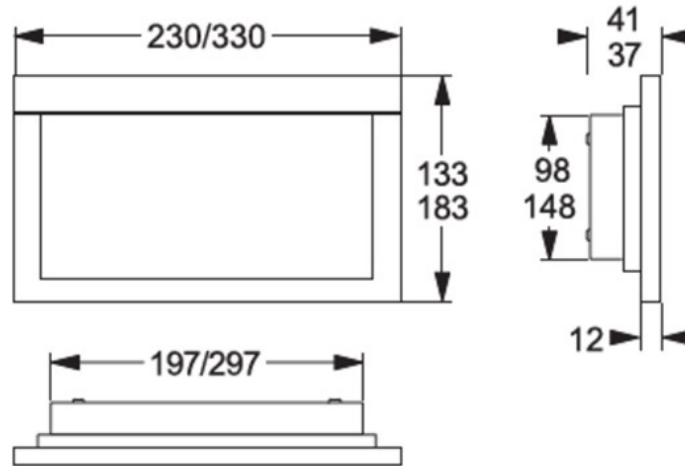

Surface wall mounting

ACCESSORIES SUPPLIED

Order Code	Description
16770	VD 20m Single Sided Kit of Exit Sign Films (Down/Right/Left/Up)
16771	VD 20m Double Sided Kit of Exit Sign Films (Down/Right/Left/Up/Blank)

TO BE ORDERED SEPARATELY

Order Code	Description
16772	VD 20m Exit Sign Film (Progress Down to the Right Indicating Change of Level)
16773	VD 20m Exit Sign Film (Progress Down to the Left Indicating Change of Level)
16774	VD 20m Exit Sign Film (Progress Up to the Right Indicating Change of Level)
16775	VD 20m Exit Sign Film (Progress Up to the Left Indicating Change of Level)
16781	VD 30m Exit Sign Film (Progress Down to the Right Indicating Change of Level)
16782	VD 30m Exit Sign Film (Progress Down to the Left Indicating Change of Level)
16783	VD 30m Exit Sign Film (Progress Up to the Right Indicating Change of Level)
16784	VD 30m Exit Sign Film (Progress Up to the Left Indicating Change of Level)
16779	VD 30m Single Sided Kit of Exit Sign Films (Down/Right/Left/Up)
16780	VD 30m Double Sided Kit of Exit Sign Films (Down/Right/Left/Up/Blank)
F95944	Bracket Suspension (VD 20m, 30m)
F95962	VD 20m Concrete Ceiling Box
F95963	VD 30m Concrete Ceiling Box
F95964	VD 20m Recessed Ceiling Mounting Set
F95965	VD 30m Recessed Ceiling Mounting Set

CONTROL SYSTEM ORDER CODES

AUTO-TEST

Part No.	Description	Emergency Operation Mode	Duration	Battery	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
37150	LTO Surface Wall Mounting (Single Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37153	LTO Surface Wall Mounting (Single Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37144	LTO Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37147	LTO Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37138	LTO Recessed Ceiling Mounting (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37141	LTO Recessed Ceiling Mounting (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37132	LTO Wire Suspension (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37135	LTO Wire Suspension (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
36194	Classic Surface Wall Mounting (Single Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36197	Classic Surface Wall Mounting (Single Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36188	Classic Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36191	Classic Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36182	Classic Recessed Ceiling Mounting (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36185	Classic Recessed Ceiling Mounting (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36176	Classic Wire Suspension (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36179	Classic Wire Suspension (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-

LOGICA SELF CONTAINED WIRED CENTRAL TESTING & MONITORING SYSTEM

Part No.	Description	Emergency Operation Mode	Duration	Battery	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
37151	LTO Surface Wall Mounting (Single Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37154	LTO Surface Wall Mounting (Single Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37145	LTO Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37148	LTO Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37139	LTO Recessed Ceiling Mounting (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37142	LTO Recessed Ceiling Mounting (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37133	LTO Wire Suspension (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37136	LTO Wire Suspension (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
36195	Classic Surface Wall Mounting (Single Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36198	Classic Surface Wall Mounting (Single Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36189	Classic Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36192	Classic Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36183	Classic Recessed Ceiling Mounting (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36186	Classic Recessed Ceiling Mounting (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36177	Classic Wire Suspension (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36180	Classic Wire Suspension (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-

LOGICA FM SELF CONTAINED WIRELESS CENTRAL TESTING & MONITORING SYSTEM

Part No.	Description	Emergency Operation Mode	Duration	Battery	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
37152	LTO Surface Wall Mounting (Single Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37155	LTO Surface Wall Mounting (Single Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37146	LTO Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37149	LTO Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37140	LTO Recessed Ceiling Mounting (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37143	LTO Recessed Ceiling Mounting (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37134	LTO Wire Suspension (Double Sided) : 20m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
37137	LTO Wire Suspension (Double Sided) : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	-	-	-	-20 °C to +50 °C		-
36196	Classic Surface Wall Mounting (Single Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36199	Classic Surface Wall Mounting (Single Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36190	Classic Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36193	Classic Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36184	Classic Recessed Ceiling Mounting (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36187	Classic Recessed Ceiling Mounting (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36178	Classic Wire Suspension (Double Sided) : 20m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-
36181	Classic Wire Suspension (Double Sided) : 30m VD	M/NM	1-3h	NiMh 7.2 V / 1.2 Ah	-	-	-	0 °C to +40 °C		-

EVG NON ADDRESSABLE SLAVE LUMINAIRES

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W.	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
T93352E	Surface Wall Mounting (Single Sided) : 20m VD	198 V – 254 V / 50 Hz	110V - 276V	2.5W	4.5VA	-	-20 to + 40 °C		-
T93355E	Surface Wall Mounting (Single Sided) : 30m VD	198 V – 254 V / 50 Hz	110V - 276V	3.0W	5.0VA	-	-20 to + 40 °C		-
T93356E	Surface Ceiling Mounting (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	110V - 276V	3.8W	6.0VA	-	-20 to + 40 °C		-
T93357E	Surface Ceiling Mounting (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	110V - 276V	5.4W	7.0VA	-	-20 to + 40 °C		-
T93351E	Recessed Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	110V - 276V	3.8W	6.0VA	-	-20 to + 40 °C		-
T93354E	Recessed Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	110V - 276V	5.4W	7.0VA	-	-20 to + 40 °C		-
T93350E	Wire Suspension (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	110V - 276V	3.8W	6.0VA	-	-20 to + 40 °C		-
T93353E	Wire Suspension (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	110V - 276V	5.4W	7.0VA	-	-20 to + 40 °C		-

ALOG 216V AC/DC CENTRALISED BATTERY SYSTEM

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W.	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
T93352A	Surface Wall Mounting (Single Sided) : 20m VD	198 V – 254 V / 50 Hz	176V - 276V	2.5W	4.5VA	-	-20 to + 40 °C	I	-
T93355A	Surface Wall Mounting (Single Sided) : 30m VD	198 V – 254 V / 50 Hz	176V - 276V	3.0W	5.0VA	-	-20 to + 40 °C	I	-
T93356A	Surface Ceiling Mounting (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	176V - 276V	3.8W	6.0VA	-	-20 to + 40 °C	I	-
T93357A	Surface Ceiling Mounting (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	176V - 276V	5.4W	7.0VA	-	-20 to + 40 °C	I	-
T93351A	Recessed Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	176V - 276V	3.8W	6.0VA	-	-20 to + 40 °C	I	-
T93354A	Recessed Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	176V - 276V	5.4W	7.0VA	-	-20 to + 40 °C	I	-
T93350A	Wire Suspension (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	176V - 276V	3.8W	6.0VA	-	-20 to + 40 °C	I	-
T93353A	Wire Suspension (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	176V - 276V	5.4W	7.0VA	-	-20 to + 40 °C	I	-

SICURO 24V DECENTRALISED BATTERY SYSTEM

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W.	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
32081	Surface Wall Mounting (Single Sided) : 20m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20 °C to + 40 °C	III	-
32082	Surface Wall Mounting (Single Sided) : 30m VD	24 V +/- 20% DC	24 V +/- 20% DC	4.3W	-	-	-20 °C to + 40 °C	III	-
32079	Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20 °C to + 40 °C	III	-
32080	Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	24 V +/- 20% DC	24 V +/- 20% DC	4.3W	-	-	-20 °C to + 40 °C	III	-
32077	Recessed Ceiling Mounting (Double Sided) : 20m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20 °C to + 40 °C	III	-
32078	Recessed Ceiling Mounting (Double Sided) : 30m VD	24 V +/- 20% DC	24 V +/- 20% DC	4.3W	-	-	-20 °C to + 40 °C	III	-
32075	Wire Suspension (Double Sided) : 20m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20 °C to + 40 °C	III	-
32076	Wire Suspension (Double Sided) : 30m VD	24 V +/- 20% DC	24 V +/- 20% DC	4.3W	-	-	-20 °C to + 40 °C	III	-

SICURO 230 216V AC/DC CENTRALISED BATTERY SYSTEM

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W.	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
31110	Surface Wall Mounting (Single Sided) : 20m VD	198 V – 254 V / 50 Hz	176 V– 276 V	3.5W	-	-	-20 °C to + 40 °C	I	-
31111	Surface Wall Mounting (Single Sided) : 30m VD	198 V – 254 V / 50 Hz	176 V– 276 V	4.7W	-	-	-20 °C to + 40 °C	I	-
31108	Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	176 V– 276 V	3.5W	-	-	-20 °C to + 40 °C	I	-
31109	Surface Ceiling Mounting/Bracket Suspension (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	176 V– 276 V	4.7W	-	-	-20 °C to + 40 °C	I	-
31106	Recessed Ceiling Mounting (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	176 V– 276 V	3.5W	-	-	-20 °C to + 40 °C	I	-
31107	Recessed Ceiling Mounting (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	176 V– 276 V	4.7W	-	-	-20 °C to + 40 °C	I	-
31104	Wire Suspension (Double Sided) : 20m VD	198 V – 254 V / 50 Hz	176 V– 276 V	3.5W	-	-	-20 °C to + 40 °C	I	-
31105	Wire Suspension (Double Sided) : 30m VD	198 V – 254 V / 50 Hz	176 V– 276 V	4.7W	-	-	-20 °C to + 40 °C	I	-

