


## BS100 ADJUSTABLE



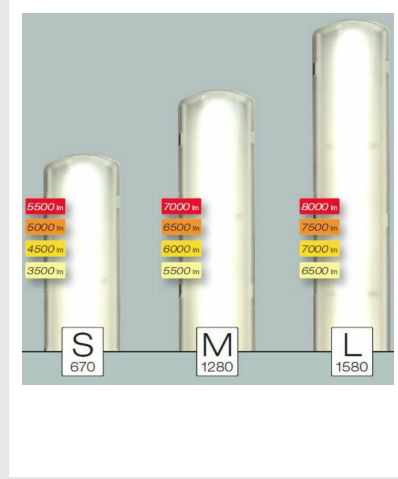


High performance fixture with high flux and low glare screen. Available for use as an Emergency Luminaire with related accessories, inverter with diagnostic LED. The fixture is equipped with a 4-position switch driver that allows the luminaire to be set to 4 different light outputs. The body of the luminaire is composed of self-extinguishing polycarbonate that is UV stabilized. The Screen is designed to spread light with reduced glare. This luminaire is best suitable for outdoor and industrial environments.

Product category: Surface, Suspended, Wall Mounted, Ceiling Mounted, Indoor, Outdoor, Industrial, Waterproof, LED

## FEATURES

<b>Application</b>	Production, Warehouses, Industrial Areas
<b>Ballast</b>	Electronic (cos = 0,98) Current Driven in 4 Different Steps
<b>Colour Rendering</b>	>80
<b>Colour Temp. (K)</b>	4000K
<b>Colours (RAL)</b>	Light Grey RAL 7035
<b>Energy Class</b>	A++
<b>IK Rating</b>	IK05
<b>IP Rating</b>	IP65
<b>Material</b>	Polycarbonate
<b>Mounting Options</b>	Ceiling, Suspension, Busbar Trunking
<b>Norms</b>	EN 60598-1, EN 60598-2-, EN 60598-2-22 (fundamental requirements), EN 62471 (Photobiological hazard)
<b>Optics</b>	White Reflective Powder Coated Steel
<b>Voltage (v)</b>	230v

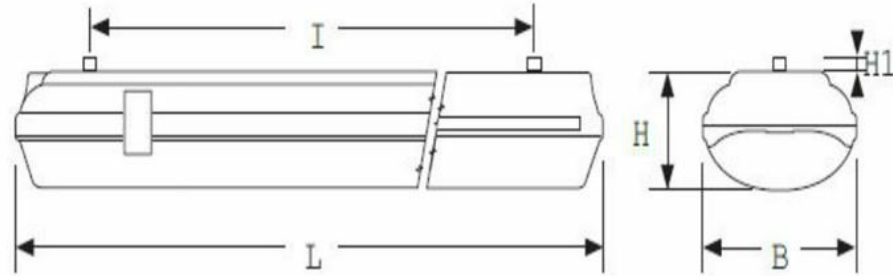

Measure	• Dimensions (mm) •					Weight max kg
	L	B	H	H1	I	
S	671	170	95	10	475	1,4
M	1280	170	95	10	660	2,3
L	1581	170	95	10	900	2,7

## ACCESSORIES SUPPLIED

Order Code	Description
-	Cable Gland M20

## TO BE ORDERED SEPARATELY

Order Code	Description
3905	Protective Grid S670
8066	Protective Grid M1280
8067	Protective Grid L1560

## CONTROL SYSTEM ORDER CODES

### TRADITIONAL ECO DRIVER

Power W.	Order Code	Description	LED Power W.	Power Consumption W.	No LEDs	Flux of LEDs	Flux of Fixture	Luminous efficiency lm/W
S	40003	BS100 LED REGOLABILE S670 4K	37W	41W	96	5500lm	3500-5500lm	134lm/W
M	40004	BS100 LED REGOLABILE M1280 4K	48W	53W	154	7000lm	5500-7000lm	133lm/W
L	40005	BS100 LED REGOLABILE L1580 4K	53W	59W	192	8000lm	6500-8000lm	136lm/W