

PIANA LED





Exit Sign Luminaire in square design housing, frame display and light guide panel. Single or double sided escape route signage is provided thanks to exchangeable display inserts.


Version for surface wall mounting, surface ceiling mounting and wire suspension or with accessories recessed ceiling mounting.

Product category: Exit Signs

FEATURES

| | |
|-------------------------|--|
| Application | Offices, Public Areas, Shops, Safety Sign |
| Colours (RAL) | RAL 9003 |
| IP Rating | IP20 |
| Mounting Options | Surface Wall (Single Sided), Surface Ceiling, Recessed Ceiling, Wire Suspension (Double Sided) |
| Visibility (m) | 24m, 30m |
| Voltage (v) | 230v, 24v DC* |

*Sicuro24 System

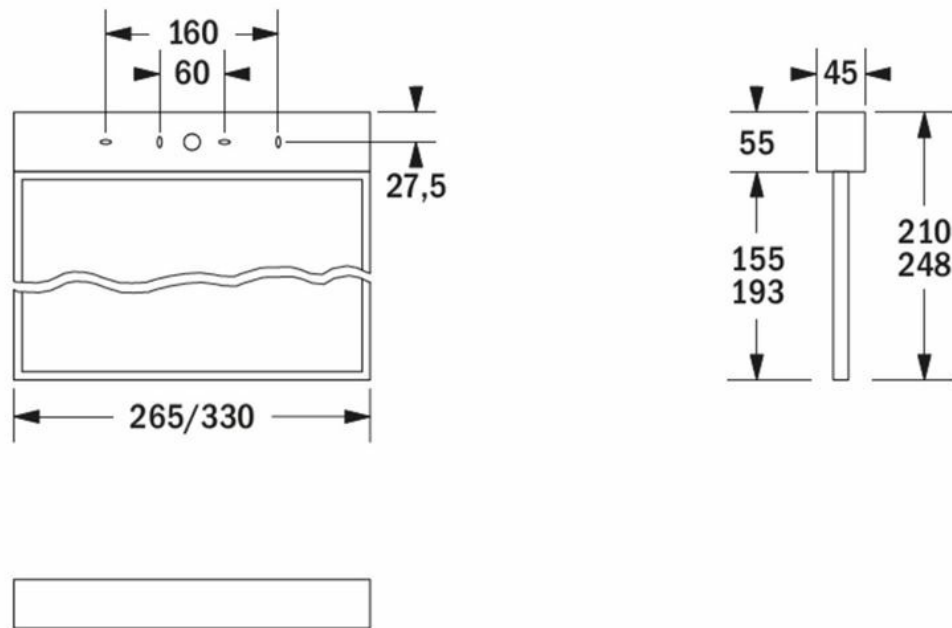

Surface wall mounting

ACCESSORIES SUPPLIED

| Order Code | Description |
|------------|--|
| - | Kit of Exit Sign Films (Left/Right/Down) |

TO BE ORDERED SEPARATELY

| Order Code | Description |
|------------|--|
| F94002 | VD 24m Recessed Ceiling Mounting Set |
| F94001 | VD 30m Recessed Ceiling Mounting Set |
| E16029M | VD 24m Kit of Exit Sign Films (Diagonal Up Left/Down Left/Up Right/Down Right) |
| E16030M | VD 30m Kit of Exit Sign Films (Diagonal Up Left/Down Left/Up Right/Down Right) |
| E16031M | VD 24m Exit Sign Film (Up Arrow) |
| E16032M | VD 30m Exit Sign Film (Up Arrow) |

CONTROL SYSTEM ORDER CODES

AUTO-TEST

| Part No. | Description | Emergency Operation Mode | Duration | Battery | Power Consumption | Luminous Flux in NM | AR Luminous Flux in NM | Luminous Flux in M | Ambient Temp | Protection Class | Net Weight |
|----------|--|--------------------------|----------|------------------------------|-------------------|---------------------|------------------------|--------------------|----------------|------------------|------------|
| 37168 | LTO Surface Wall/Surface Ceiling Mounting : 24m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37171 | LTO Surface Wall/Surface Ceiling Mounting : 30m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37174 | LTO Surface Ceiling Wire Suspension : 24m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37177 | LTO Surface Ceiling Wire Suspension : 30m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| N94101AT | Classic Surface Wall/Surface Ceiling Mounting : 24m VD | M/NM | 3h | NiCd 3.6 V / 0.6 Ah | 3.5W | - | - | - | 0°C to +40°C | II | - |
| N94111AT | Classic Surface Wall/Surface Ceiling Mounting : 30m VD | M/NM | 3h | NiCd 3.6 V / 0.6 Ah | 3.5W | - | - | - | 0°C to +40°C | II | - |
| N94103AT | Classic Surface Ceiling Wire Suspension : 24m VD | M/NM | 3h | NiCd 3.6 V / 0.9 Ah | 3.5W | - | - | - | 0°C to +40°C | II | - |
| N94113AT | Classic Surface Ceiling Wire Suspension : 30m VD | M/NM | 3h | NiCd 3.6 V / 0.9 Ah | 3.5W | - | - | - | 0°C to +40°C | II | - |

LOGICA SELF CONTAINED WIRED CENTRAL TESTING & MONITORING SYSTEM

| Part No. | Description | Emergency Operation Mode | Duration | Battery | Power Consumption | Luminous Flux in NM | AR Luminous Flux in NM | Luminous Flux in M | Ambient Temp | Protection Class | Net Weight |
|----------|--|--------------------------|----------|------------------------------|-------------------|---------------------|------------------------|--------------------|----------------|------------------|------------|
| 37169 | Surface Wall/Surface Ceiling Mounting : 24m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37172 | Surface Wall/Surface Ceiling Mounting : 30m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37175 | Surface Ceiling Wire Suspension : 24m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37178 | Surface Ceiling Wire Suspension : 30m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |

LOGICA FM SELF CONTAINED WIRELESS CENTRAL TESTING & MONITORING SYSTEM

| Part No. | Description | Emergency Operation Mode | Duration | Battery | Power Consumption | Luminous Flux in NM | AR Luminous Flux in NM | Luminous Flux in M | Ambient Temp | Protection Class | Net Weight |
|----------|--|--------------------------|----------|------------------------------|-------------------|---------------------|------------------------|--------------------|----------------|------------------|------------|
| 37170 | Surface Wall/Surface Ceiling Mounting : 24m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37173 | Surface Wall/Surface Ceiling Mounting : 30m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37176 | Surface Ceiling Wire Suspension : 24m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |
| 37179 | Surface Ceiling Wire Suspension : 30m VD | M/NM | 1-3-8h | 2 x LTO 7.2 V / 0.5 Ah | 3.5W | - | - | - | -20°C to +50°C | II | - |

SICURO 24V DECENTRALISED BATTERY SYSTEM

| Part No. | Description | Mains Supply | Battery Supply | Power Consumption W | Power Consumption VA | Luminous Flux | Ambient Temp | Protection Class | Net Weight |
|----------|--|-----------------|-----------------|---------------------|----------------------|---------------|----------------|------------------|------------|
| 32085 | Surface Wall/Surface Ceiling Mounting : 24m VD | 24 V +/- 20% DC | 24 V +/- 20% DC | 2.9W | - | - | -20°C to +40°C | III | - |
| 32086 | Surface Wall/Surface Ceiling Mounting : 30m VD | 24 V +/- 20% DC | 24 V +/- 20% DC | 2.9W | - | - | -20°C to +40°C | III | - |
| 32087 | Surface Ceiling Wire Suspension : 24m VD | 24 V +/- 20% DC | 24 V +/- 20% DC | 2.9W | - | - | -20°C to +40°C | III | - |
| 32088 | Surface Ceiling Wire Suspension : 30m VD | 24 V +/- 20% DC | 24 V +/- 20% DC | 2.9W | - | - | -20°C to +40°C | III | - |

SICURO 230 216V AC/DC CENTRALISED BATTERY SYSTEM

| Part No. | Description | Mains Supply | Battery Supply | Power Consumption W | Power Consumption VA | Luminous Flux | Ambient Temp | Protection Class | Net Weight |
|----------|--|------------------|----------------|---------------------|----------------------|---------------|----------------|------------------|------------|
| 31116 | Surface Wall/Surface Ceiling Mounting : 24m VD | 198V - 254V/50Hz | 176V - 276V | 3.5W | 7.4 VA | - | -20°C to +40°C | II | - |
| 31117 | Surface Wall/Surface Ceiling Mounting : 30m VD | 198V - 254V/50Hz | 176V - 276V | 3.5W | 7.4 VA | - | -20°C to +40°C | II | - |
| 31118 | Surface Ceiling Wire Suspension : 24m VD | 198V - 254V/50Hz | 176V - 276V | 3.5W | 7.4 VA | - | -20°C to +40°C | II | - |
| 31119 | Surface Ceiling Wire Suspension : 30m VD | 198V - 254V/50Hz | 176V - 276V | 3.5W | 7.4 VA | - | -20°C to +40°C | II | - |

