

PIANA LED





Exit Sign Luminaire in square design housing, frame display and light guide panel. Single or double sided escape route signage is provided thanks to exchangeable display inserts.


Version for surface wall mounting, surface ceiling mounting and wire suspension or with accessories recessed ceiling mounting.

Product category: Exit Signs

FEATURES

Application	Offices, Public Areas, Shops, Safety Sign
Colours (RAL)	RAL 9003
IP Rating	IP20
Mounting Options	Surface Wall (Single Sided), Surface Ceiling, Recessed Ceiling, Wire Suspension (Double Sided)
Visibility (m)	24m, 30m
Voltage (v)	230v, 24v DC*

*Sicuro24 System

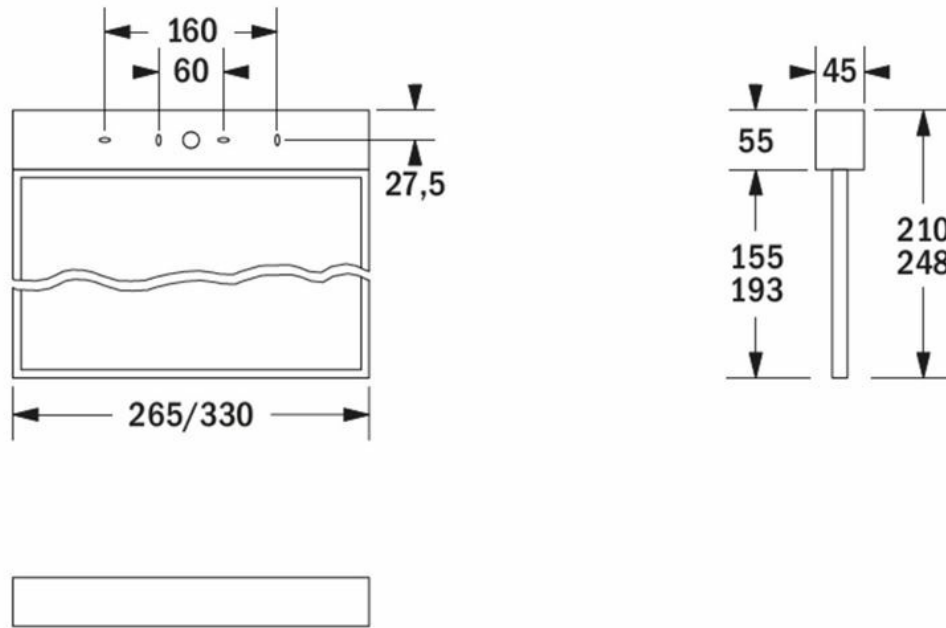

Surface wall mounting

ACCESSORIES SUPPLIED

Order Code	Description
-	Kit of Exit Sign Films (Left/Right/Down)

TO BE ORDERED SEPARATELY

Order Code	Description
F94002	VD 24m Recessed Ceiling Mounting Set
F94001	VD 30m Recessed Ceiling Mounting Set
E16029M	VD 24m Kit of Exit Sign Films (Diagonal Up Left/Down Left/Up Right/Down Right)
E16030M	VD 30m Kit of Exit Sign Films (Diagonal Up Left/Down Left/Up Right/Down Right)
E16031M	VD 24m Exit Sign Film (Up Arrow)
E16032M	VD 30m Exit Sign Film (Up Arrow)

CONTROL SYSTEM ORDER CODES

AUTO-TEST

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
37168	LTO Surface Wall/Surface Ceiling Mounting : 24m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37171	LTO Surface Wall/Surface Ceiling Mounting : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37174	LTO Surface Ceiling Wire Suspension : 24m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37177	LTO Surface Ceiling Wire Suspension : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
N94101AT	Classic Surface Wall/Surface Ceiling Mounting : 24m VD	M/NM	3h	NiCd 3.6 V / 0.6 Ah	3.5W	-	-	-	0°C to +40°C	II	-
N94111AT	Classic Surface Wall/Surface Ceiling Mounting : 30m VD	M/NM	3h	NiCd 3.6 V / 0.6 Ah	3.5W	-	-	-	0°C to +40°C	II	-
N94103AT	Classic Surface Ceiling Wire Suspension : 24m VD	M/NM	3h	NiCd 3.6 V / 0.9 Ah	3.5W	-	-	-	0°C to +40°C	II	-
N94113AT	Classic Surface Ceiling Wire Suspension : 30m VD	M/NM	3h	NiCd 3.6 V / 0.9 Ah	3.5W	-	-	-	0°C to +40°C	II	-

LOGICA SELF CONTAINED WIRED CENTRAL TESTING & MONITORING SYSTEM

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
37169	Surface Wall/Surface Ceiling Mounting : 24m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37172	Surface Wall/Surface Ceiling Mounting : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37175	Surface Ceiling Wire Suspension : 24m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37178	Surface Ceiling Wire Suspension : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-

LOGICA FM SELF CONTAINED WIRELESS CENTRAL TESTING & MONITORING SYSTEM

Part No.	Description	Emergency Operation Mode	Duration	Battery	Power Consumption	Luminous Flux in NM	AR Luminous Flux in NM	Luminous Flux in M	Ambient Temp	Protection Class	Net Weight
37170	Surface Wall/Surface Ceiling Mounting : 24m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37173	Surface Wall/Surface Ceiling Mounting : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37176	Surface Ceiling Wire Suspension : 24m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-
37179	Surface Ceiling Wire Suspension : 30m VD	M/NM	1-3-8h	2 x LTO 7.2 V / 0.5 Ah	3.5W	-	-	-	-20°C to +50°C	II	-

SICURO 24V DECENTRALISED BATTERY SYSTEM

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
32085	Surface Wall/Surface Ceiling Mounting : 24m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20°C to +40°C	III	-
32086	Surface Wall/Surface Ceiling Mounting : 30m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20°C to +40°C	III	-
32087	Surface Ceiling Wire Suspension : 24m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20°C to +40°C	III	-
32088	Surface Ceiling Wire Suspension : 30m VD	24 V +/- 20% DC	24 V +/- 20% DC	2.9W	-	-	-20°C to +40°C	III	-

SICURO 230 216V AC/DC CENTRALISED BATTERY SYSTEM

Part No.	Description	Mains Supply	Battery Supply	Power Consumption W	Power Consumption VA	Luminous Flux	Ambient Temp	Protection Class	Net Weight
31116	Surface Wall/Surface Ceiling Mounting : 24m VD	198V - 254V/50Hz	176V - 276V	3.5W	7.4 VA	-	-20°C to +40°C	II	-
31117	Surface Wall/Surface Ceiling Mounting : 30m VD	198V - 254V/50Hz	176V - 276V	3.5W	7.4 VA	-	-20°C to +40°C	II	-
31118	Surface Ceiling Wire Suspension : 24m VD	198V - 254V/50Hz	176V - 276V	3.5W	7.4 VA	-	-20°C to +40°C	II	-
31119	Surface Ceiling Wire Suspension : 30m VD	198V - 254V/50Hz	176V - 276V	3.5W	7.4 VA	-	-20°C to +40°C	II	-

